


## Avoid Limitations of Small Scale Recovery

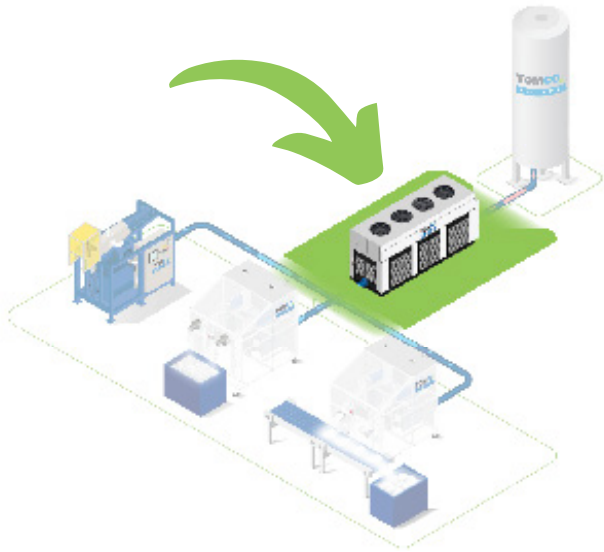


Supercharge your liquid with TOMCO Systems' OptiCooler. Enables the production of more ice with less liquid CO<sub>2</sub>.

IMPROVED CONVERSION EFFICIENCY ACROSS  
**ALL** DOWNSTREAM EQUIPMENT WITH ONE UNIT  
 UP TO 20% IN CO<sub>2</sub> SAVINGS

### Benefits

- Reduces the temperature of your supply liquid **BELOW** its saturation pressure to maximize conversion rate
- Conversion ratios as low as 1.4:1
- Uses less liquid while increasing overall output
- Connects in line to ALL plant equipment
- Give your liquid extra capacity to handle piping inefficiencies

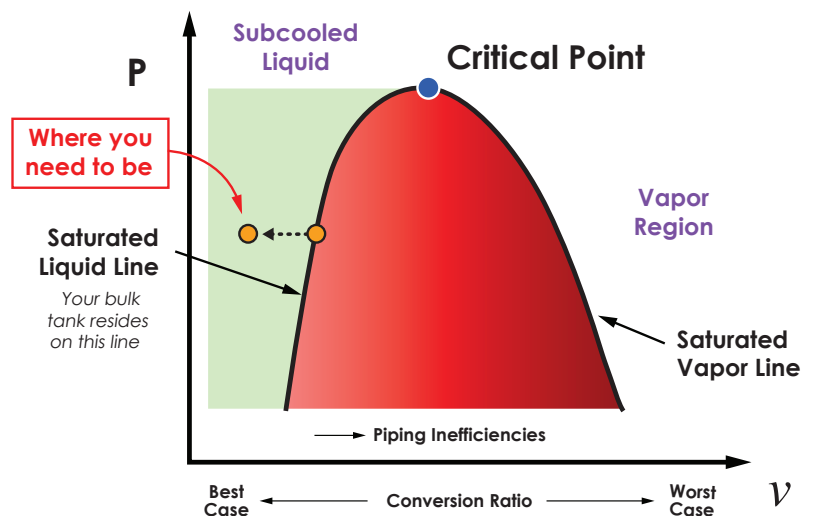


# OptiCooler

## Specifications

### OptiCooler

- OptiCooler Model Dimensions & Power Consumption
  - 480V, 3Ph, 60Hz
  - 48 1/2" W X 142" L X 65" H and 3,000 pounds
  - PLC controlled
- Up to 4 ice machines
- Online Monitoring
- Auto On/Off Based on Demand

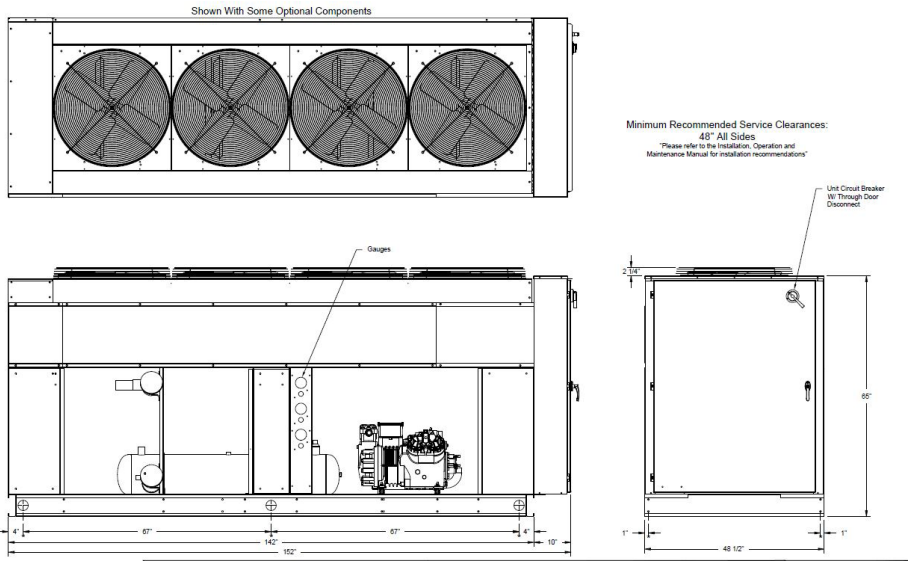

### OptiCooler XL

- OptiCooler XL Model Dimensions & Power Consumption
  - 480V, 3Ph, 60Hz
  - 97" W X 174" L X 65" H and 6,100 pounds
  - PLC controlled
- Online Monitoring
- Up to 10 Ice Machines
- Auto On/Off Based on Demand

